

Standard Equipment /Optional Equipment

Standard Equipment

Fully suspended operator compartment (2t & 2.5t)

Narrow chassis width

Key switch or PIN Code access

Multifunction coloured display as well as hourmeter, maintenance indication, battery discharge indicator and internal fault code indication

Power assisted steering

Automatic speed reduction when cornering

ECO-Mode with up to 12% energy savings

Drive wheel position mentioned in display

Steering wheel left or right side

Automatic speed reduction when cornering

Electromagnetic emergency brake acting proportionally to the load weight

CAN bus technology

Drive wheel Polyurethane

Single load wheels Polyurethane

Lateral battery change 3PzS available with an ergonomic battery un/locking with lever & rollers (l2=725mm)

Width over fork carriage: 520mm, 540mm, 560mm & 680mm

Fork carriage length: 1000mm, 1150mm, 1160mm, 2400mm (overhang 188mm) and 2400mm (overhang 563mm)

Protection -10°C

Optional Equipment

Drive wheels: cushion rubber, synthetic cushion rubber non marking, wet grip

Load wheels: tandem polyurethane, single polyurethane greasable, tandem polyurethane greasable

Lateral battery change 4PzS available with ergonomic battery un/locking with lever & rollers (l2=825mm)

Load backrests with h=1115mm and h=1875mm

Floor compensator

Speed reduction if forks lowered

Linde Connected Solutions:

ac:access control (PIN or RFID Dual), an:usage analysis and dt:crash detection

Pole on left side for additional support

Pole on right side for flashing beacon

Support Clipboard DIN A4

Support data terminal incl. power supply cable 24V

Mobile or Fixed battery stand

Automatic battery watering system

Cold store protection -35°C

Other options available on request

Li-ION technology

Rapid full charge

Opportunity charging

Rapid intermediate charging

Maintenance free

Extended lifetime

Efficient performance in Cold Store

Side plug available

Li-ION batteries

Fits in 4 PzS SL compartment: 4,5kWh-9kWh (205Ah-410Ah)

Includes battery housing extra weight

Li-ION charger

Optimized 24V-Charger v255: full charging time 1h30min

(4,5kWh) and 2h40min (9,0kWh)



Stand-on Pallet Truck Capacity 2,000 and 2,500 kg T20 SR, T25 SR

Series 1154

Linde Material Handling

Linde

Safety

High performance combined with safety. The operator's body remains safely within the chassis contours at all time.

A deadman foot switch ensures instant braking response when necessary. The truck comes rapidly to a smooth stop thanks to an electromagnetic brake which acts proportionally to the load on the forks. Due to its compact chassis, the fork tips are easily visible ensuring safe load handling.

Performance

One of the truck's great strengths is its productivity. The compact drive unit permits precise manoeuvring for reaching the utmost performance. With capacity from 2,000 kg up to 2,500 kg, and a powerful maintenance-free 3 kW drive motor providing a maximum speed of 12 km/h, the Stand-on Pallet Truck is ideally suited to intensive lorry loading and unloading and rapid pallet transfer applications.

Comfort

The fully suspended operator compartment, completely decoupled from the chassis keeps the driver concentrated and maintains high efficiency levels throughout the shift. Allied with a padded backrest, the operator's stability is assured.

Reliability

Rugged construction and the use of tried and tested components make this a truck that can be relied on. Smooth fork entry into close pallets is assured by the profiled shape of the fork tips and the entry skid. These features guarantee a longer operating life combined with fast, safe and easy load handling.

Service

Efficiency at work and efficiency in servicing with cost effective maintenance routine. Easy access to all components and maintenance-free technology also play their part in increasing truck uptime and availability. CAN bus connectivity provides a computerised diagnostic system for rapid analysis to ensure maintenance intervals are also minimised.

Features

Fully suspended operator compartment

- Standard on 2t & 2.5t versions
- Decoupled stand-on platform and drive unit from the chassis
- Comfortable and curved padded backrest
- Significant reduction of vibrations transmitted to the body

Handling

- Chassis width = 790mm
- Small l2 dimension =725mm
- High maneuverability when operating in lorries or confined spaces
- High stand-on position for good visibility
- Stable 4 point configuration



Workstation

- Multifunctional coloured display with easy & ergonomic menu structure
- Truck access control by PIN code or ignition key
- Wide and deep storage compartment for work gloves, writing utensils etc...
- Support clipboard DIN A4, flashing beacon, data support terminal available as option



TipControl®

- Traction, lift controls and horn grouped in one single ergonomic unit
- Enables one-handed operations
- High modularity : either left or right side
- Height adjustable hand platform



Comprehensive energy solutions


- 24V batteries : capacities from 345 Ah (3PzS) to 500 Ah (4PzS)
- Standard Lateral change including rollers inside the battery compartment to aid battery change
- Lever initiates battery change preventing direct contact
- Li-ION batteries with 4,5kWh(205Ah) and 9,0kWh(410Ah)
- Rapid full charge in 1h30min with optimized charger

Ergonomics

- Ergonomic 90° driving position
- TipControl®, an innovative drive and lift control unit
- Steering wheel on right or left side
- Ergonomic driving position with comfortable backrest

Drive control and settings

- Steering effort adjusts automatically to speed and turning radius
- Speed is automatically reduced in relation to the steering angle
- ECO-Mode up to 12% energy savings to finish shift with low battery status

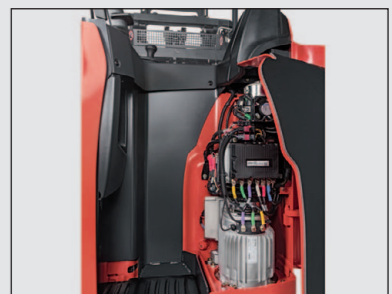

AC motor

- Powerful, 3 kW drive motor
- Maintenance-free, moisture and dust proof AC motor
- Gradient performance of max. 15% (laden)
- No roll back on gradient starts
- High torque motor negotiates loading docks with ease

Technical Data according to VDI 2198

			LINDE	LINDE	
Characteristics	1.1	Manufacturer	LINDE	LINDE	
	1.2	Manufacturer's type designation	T20SR	T25SR	
	1.2a	Series	1154-01	1154-01	
	1.3	Power unit	Battery	Battery	
	1.4	Operation	Stand on	Stand on	
	1.5	Load capacity/Load	Q (t)	2.0	2.5
	1.6	Load centre distance	c (mm)	600	800
	1.8	Axle centre to fork face	x (mm)	895 / 965 ¹⁾²⁾	1345 / 1415 ¹⁾²⁾
	1.9	Wheelbase	y (mm)	1464 / 1534 ¹⁾²⁾	1914 / 1984 ¹⁾²⁾
Weights	2.1	Service weight	(kg)	848 ³⁾⁴⁾	944 ³⁾⁴⁾
	2.2	Axle load with load, front/rear	(kg)	1075 / 1773 ³⁾⁴⁾	1451 / 1993 ³⁾⁴⁾
	2.3	Axle load without load, front/rear	(kg)	672 / 176 ³⁾⁴⁾	739 / 205 ³⁾⁴⁾
Wheels/Tyres	3.1	Tyres rubber, SE, pneumatic, polyurethane	V+P/P ⁵⁾	V+P/P ⁵⁾	
	3.2	Tyre size, front		Ø 254 x 102	Ø 254 x 102
	3.3	Tyre size, rear		Ø 85 x 105 (2x Ø 85 x 80) ⁶⁾	Ø 85 x 105 (2x Ø 85 x 80) ⁶⁾
	3.5	Wheels, number front/rear (x = driven)		1x + 2 / 2 (1x + 2 / 4) ⁴⁾	1x + 2 / 2 (1x + 2 / 4) ⁴⁾
	3.6	Track width, front	b10 (mm)	484 ⁷⁾	484 ⁷⁾
	3.7	Track width, rear	b11 (mm)	395 ⁷⁾	395 ⁷⁾
Dimensions	4.4	Lift	h3 (mm)	125 ⁷⁾	125 ⁷⁾
	4.8	Height of seat/stand on platform	h7 (mm)	-	-
	4.15	Height, lowered	h13 (mm)	88 ⁷⁾	88 ⁷⁾
	4.19	Overall length	l1 (mm)	1875 ⁷⁾	2325 ⁷⁾
	4.20	Length to fork face	l2 (mm)	725 ⁷⁾	725 ⁷⁾
	4.21	Overall width	b1/b2 (mm)	790 ⁷⁾	790 ⁷⁾
	4.22	Fork dimensions DIN ISO 2331	s/e/l (mm)	55 x 165 x 1150	55 x 165 x 1600
	4.25	Fork spread	b5 (mm)	520/540/560/680 ⁷⁾	520/540/560/680 ⁷⁾
	4.32	Ground clearance, centre of wheelbase	m2 (mm)	30 ⁹⁾	30 ⁹⁾
	4.33	Load dimension b12 x l6	b12 x l6 (mm)	-	2x1200 x 800
	4.34	Aisle width predetermined load dimensions	Ast (mm)	-	3756 ⁹⁾¹⁰⁾
	4.34.1	Aisle width for pallets 1000 x 1200 crossways	Ast (mm)	2100 ⁹⁾¹¹⁾	-
	4.34.2	Aisle width with pallet 800 x 1200 along forks	Ast (mm)	2150 ⁹⁾	-
	4.35	Turning radius	Wa (mm)	1645 / 1715 ¹⁾	2090 / 2160 ¹⁾
Performance	5.1	Travel speed, with/without load	(km/h)	10 / 12 ¹²⁾	10 / 12 ¹²⁾
	5.2	Lifting speed, with/without load	(m/s)	0.036 / 0.043 ⁴⁾	0.027 / 0.034 ⁴⁾
	5.3	Lowering speed, with/without load	(m/s)	0.064 / 0.06 ⁴⁾	0.067 / 0.059 ⁴⁾
	5.8	Maximum climbing ability, with/without load	(%)	15.0 / 20.0	9.0 / 20.0
	5.9	Acceleration time, with/without load	(s)	-	-
	5.10	Service brake		Electro-magnetic	Electro-magnetic
Drive	6.1	Drive motor rating S2 60 min	(kW)	3	3
	6.2	Lift motor rating at S3 15%	(kW)	1.2	1.5
	6.3	Battery according to DIN 43531/35/36 A,B,C,no		43 535/B 3PzS [Li-ION (4PzS)]	43 535/B 3PzS [Li-ION (4PzS)]
	6.4	Battery voltage/rated capacity (5h)	(V)/(Ah)	24 / 345/375 [23/205] ¹³⁾	24 / 345/375 [23/205] ¹³⁾
	6.5	Battery weight (+ 5%)	(kg)	287 [312] ¹³⁾	287 [312] ¹³⁾
	6.6	Power consumption according to VDI cycle	(kWh/h)	0.4	0.53
	6.7	Turnover output	(t/h)	146.0	170.0
	6.8	Energy consumption at turnover output	(kWh/h)	1.5	1.77
	8.1	Type of drive unit		LAC	LAC
	10.7	Sound pressure level LpAZ (at the driver's seat)	(dB(A))	65 ¹⁴⁾	-

- 1) Forks upraised / lowered
- 2) (+ 5 mm)
- 3) Figures with battery, see line 6.4/6.5.
- 4) (+ 10%)
- 5) Solid rubber + polyurethane / polyurethane
- 6) Figures in parenthesis with tandem load wheels.
- 7) (-0/+5 mm)
- 8) (+ 2 mm)
- 9) Including a 200 mm (min.) operating aisle clearance.
- 10) With load: pallet 2x 800x1200 mm crosswise
- 11) With fork length 1150 mm
- 12) (+ 5%)
- 13) Figures in [] with Li-ION battery see line 6.4
- 14) (+ 2.5)

